

# THERMOCODE 53E

THERMAL TRANSFER CODER



## FEATURES

- ▶ 300dpi (12 dots/mm) resolution
- ▶ Self levelling printhead
- ▶ All electronic operation
- ▶ No mechanical adjustments required for print quality
- ▶ Multi-function display
- ▶ 1.5MB memory
- ▶ Onboard printer diagnostics
- ▶ Printer status display
- ▶ Multi-level access
- ▶ Multi-language facility
- ▶ Quality engineered product
- ▶ Proven technology
- ▶ Full networking capability
- ▶ User friendly
- ▶ Simple ribbon threading
- ▶ Low ribbon warning
- ▶ End of ribbon alarm
- ▶ No compressed air

An ideal first step into Thermal Transfer coding technology where regular date, batch and price code changes, real time coding, barcodes and/or graphics are required.

Suitable for all intermittent motion packaging and labelling machinery.



**OPEN  
DATE**

*World Class Coding & Marking Systems*



*getting you  
up to speed*

# THERMOCODE 53E



The Open Date Thermocode 53E thermal transfer coder utilises many of the features of the well proven Series 2 range. It is compact and can be easily installed on to most types of intermittent motion labelling and packaging machinery.

The 53E does not use compressed air and no mechanical levelling or height adjustments are required for print quality. Print pressure, burn values and speed adjustments are all carried out via the display module and individually stored within the print format.



## SPECIFICATIONS

### Thermocode 53E


Print area – maximum	53.3mm x 30mm
Printhead width	53.3mm
Printhead resolution	300dpi (12 dots/mm)
Ribbon width	55mm
Ribbon capacity	300m maximum
Ribbon diameter	65mm maximum
Printer weight	5kg
Cycles per minute	350 maximum
Print speed per second	400mm maximum
Memory capacity	1.5MB
Supply voltage	115/240 volts AC
Power supply weight	4.5kg
Baud rate – maximum	115,200bps

## STANDARD PRINT FORMATS

The 53E is supplied pre-loaded with a selection of commonly used print formats along with three fonts, one Bitmap (.sfp) and two TrueType (.ttf). These print formats can be edited and saved via the display module. Should the pre-loaded formats or fonts not be suitable then users can create their own with the optional Codesoft Pro format design software. Additionally Codesoft Pro can be linked to a variety of databases.

## CONSUMABLES

Open Date thermal transfer ribbon is available in a wide range of sizes, colours and qualities to suit the entire range of Thermocode printers plus most other makes and models. Extended warranty terms apply when Open Date ribbon is used in conjunction with Thermocode printers.

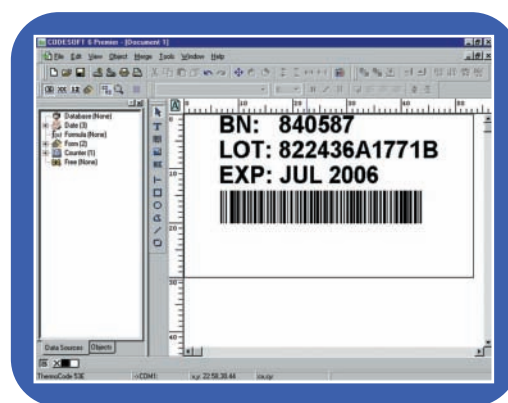

**PPMA**

**OPEN  
DATE**

**Open Date Equipment Ltd**  
Units 8 & 9 Puma Trade Park  
145 Morden Road  
Mitcham, Surrey, CR4 4DG.  
**UNITED KINGDOM**  
Tel: +44 (0)20 8655 4999  
Fax: +44 (0)20 8655 4990  
Email: sales@opendate.co.uk  
Web site: www.opendate.co.uk

**Open Date Systems Inc**  
Springfield Road, PO Box 538  
Georges Mills, NH 03751  
**U.S.A.**  
Tel: +(1) 603 763 3444  
Fax: +(1) 603 763 4222  
Toll free: 877-OPENDATE  
Email: info@opendate.com  
Web site: www.opendate.com

**Open Date France**  
Z.I. D'Attichy  
60350 Attichy  
**France**  
Tel: +33 (0) 344 42 94 43  
Fax: +33 (0) 344 42 17 17  
Email: info@opendatefrance.com  
Web site: www.opendatefrance.com

**Open Date GmbH**  
Mittlere Stämmig 4  
97297 Üttingen  
**Germany**  
Tel: +49 (0) 9369 98 24 0  
Fax: +49 (0) 9369 98 24 24  
Email: info@opendate.de  
Web Site: www.opendate.de